
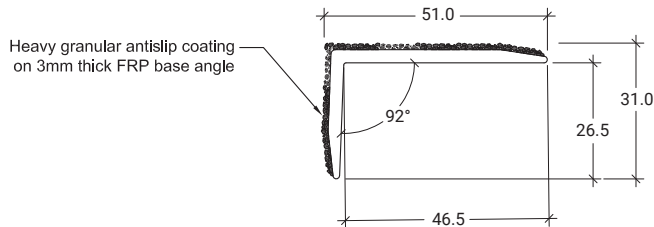


50X30MM MFRP STAIR NOSING

Available in Industrial Grey / Safety Yellow

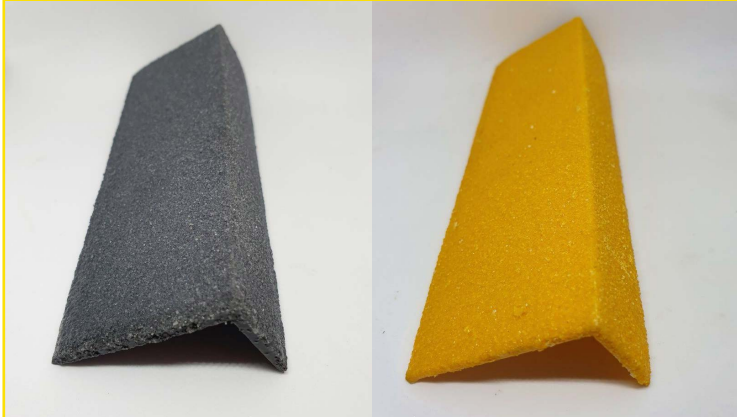

MFRP 50mm
profile cross section

SKU

MFRPG50 (Industrial Grey)
MFRPY50 (Safety Yellow)

**OPUS CO-EFFICIENT
OF FRICTION:**

MEAN BP = 88 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing



Supplied in 1m -3m lengths or custom cut to length as required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

3 Metres

50X30MM MFRP STAIR NOSING

Glow In The Dark

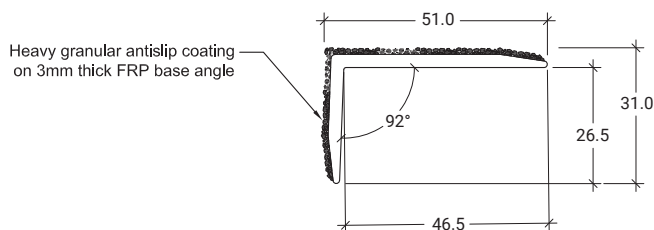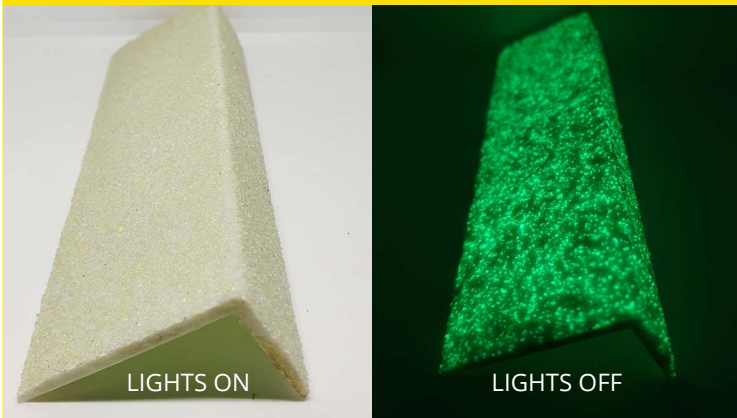

MFRP 50mm
profile cross section

SKU

MFRPGLO50

**OPUS CO-EFFICIENT
OF FRICTION:**

MEAN BP = 88 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing
- Glow in the dark



Supplied in 1m - 3m lengths or custom cut to length as required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

3 Metres

70X30MM MFRP STAIR NOSING

Available in Industrial Grey / Safety Yellow

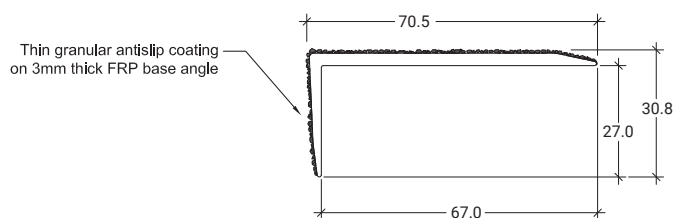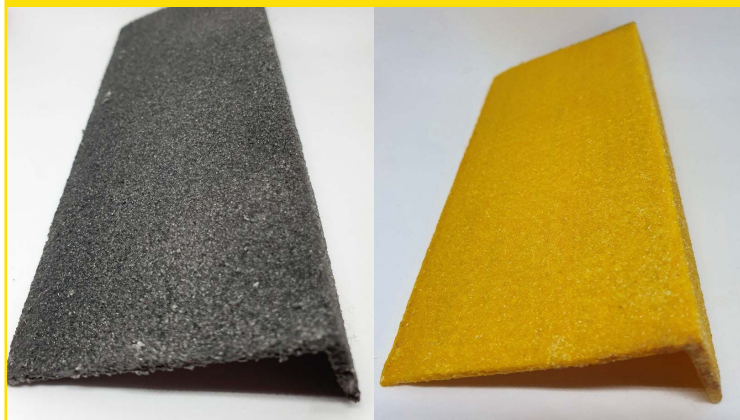

MFRP 70mm
profile cross section

SKU

MFRPG70 (Industrial Grey)
MFRPY70 (Safety Yellow)

OPUS CO-EFFICIENT OF FRICTION:

MEAN BP = 95 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing


Supplied in 1m -3m lengths or custom cut to length as required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

3 Metres

50MM FRP DECK TREAD

Available in Industrial Grey / Safety Yellow / Black

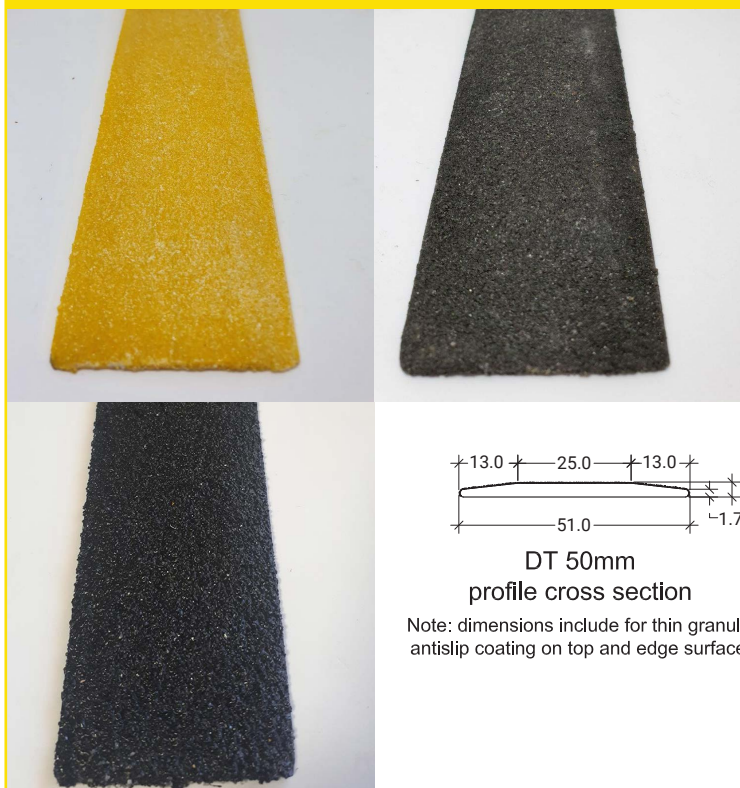

SKU	DT50G (Industrial Grey) DT50Y (Safety Yellow) DT50B (Black)
OPUS CO-EFFICIENT OF FRICTION:	MEAN BP = 77 CLASS = P5
BRIEF DESCRIPTION	<p>Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit.</p> <ul style="list-style-type: none"> Guaranteed from delamination for 5 years from purchase date Corrosion resistant Wear and impact resistant UV resistant Flame retardant Light weight, easy to install and hard wearing <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
MAXIMUM LENGTH	3 Metres

50MM FRP DECK TREAD


Glow In The Dark



SKU	DT50GLO
OPUS CO-EFFICIENT OF FRICTION:	MEAN BP = 77 CLASS = P5
BRIEF DESCRIPTION	<p>Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit.</p> <ul style="list-style-type: none"> Guaranteed from delamination for 5 years from purchase date Corrosion resistant Wear and impact resistant UV resistant Flame retardant Light weight, easy to install and hard wearing <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
MAXIMUM LENGTH	3 Metres

90MM FRP DECK TREAD

Available in Industrial Grey / Safety Yellow / Black




DT 90mm
profile cross section

Note: dimensions include for 1mm thick granular
antislip coating on top and edge surfaces

SKU	DT90G (Industrial Grey) DT90Y (Safety Yellow) DT90B (Black)
OPUS CO-EFFICIENT OF FRICTION:	MEAN BP = 69 CLASS = P5
BRIEF DESCRIPTION	<p>Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit.</p> <ul style="list-style-type: none"> • Guaranteed from delamination for 5 years from purchase date • Corrosion resistant • Wear and impact resistant • UV resistant • Flame retardant • Light weight, easy to install and hard wearing <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
MAXIMUM LENGTH	3 Metres

FRP FLOOR TILE - 500mm x 500mm

Available in Industrial Grey / Safety Yellow

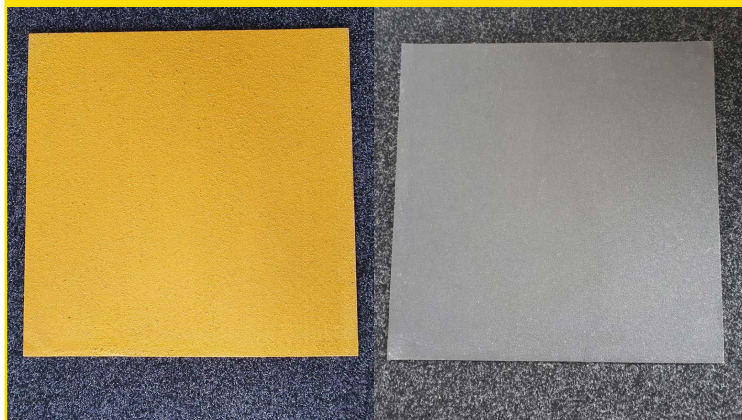

SKU

FRP-TG (Industrial Grey)
FRP-TY (Safety Yellow)

**OPUS CO-EFFICIENT
OF FRICTION:**

MEAN BP = 73 CLASS = P5

BRIEF DESCRIPTION

FRP floor tiles are light, easy to install and hard wearing.

- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing