

SLIPPROOFNZ

ANTI-SLIP SAFETY SOLUTIONS

PRODUCT CATALOGUE SEPTEMBER 2026

Visit our e-commerce site for full details and pricing

Direct Importers and Wholesalers of quality products, supplying industrial, commercial and residential sites nationwide.

Slip Proof NZ has been the stair, deck, ramp and flooring safety specialists since 2008, eliminating and minimising slip, trip and fall hazards throughout NZ.

MFRP and Aluminum Stair Nosing, Deck Tread, Glow in the Dark Nosing, Slippery Tile and Concrete Treatments.

Products are independently tested in NZ by WSP to comply with D1 / AS1 building code. All test results are able to be viewed on our website.

SLIPPROOFNZ

ANTI-SLIP SAFETY SOLUTIONS

**Your stair, deck, ramp and flooring
safety specialists since 2008**

*Slip Proof
FRP Deck Tread
being installed on
Taupo waterfront
boardwalk*

Eliminate / minimise slip, trip and fall hazards.

Direct importers and wholesalers of quality
products supplying Nationwide.

Stair nosing, deck tread, glow
in the dark products, slippery tile
and concrete treatments.

Products are independently
tested in NZ by WSP to comply
with D1/AS1 building code.


Phone us today to
discuss your area of
concern for advise and
no obligation quote.

Slip Proof NZ

P 0800 55 56 57

E info@slipproof.co.nz

www.slipproof.co.nz

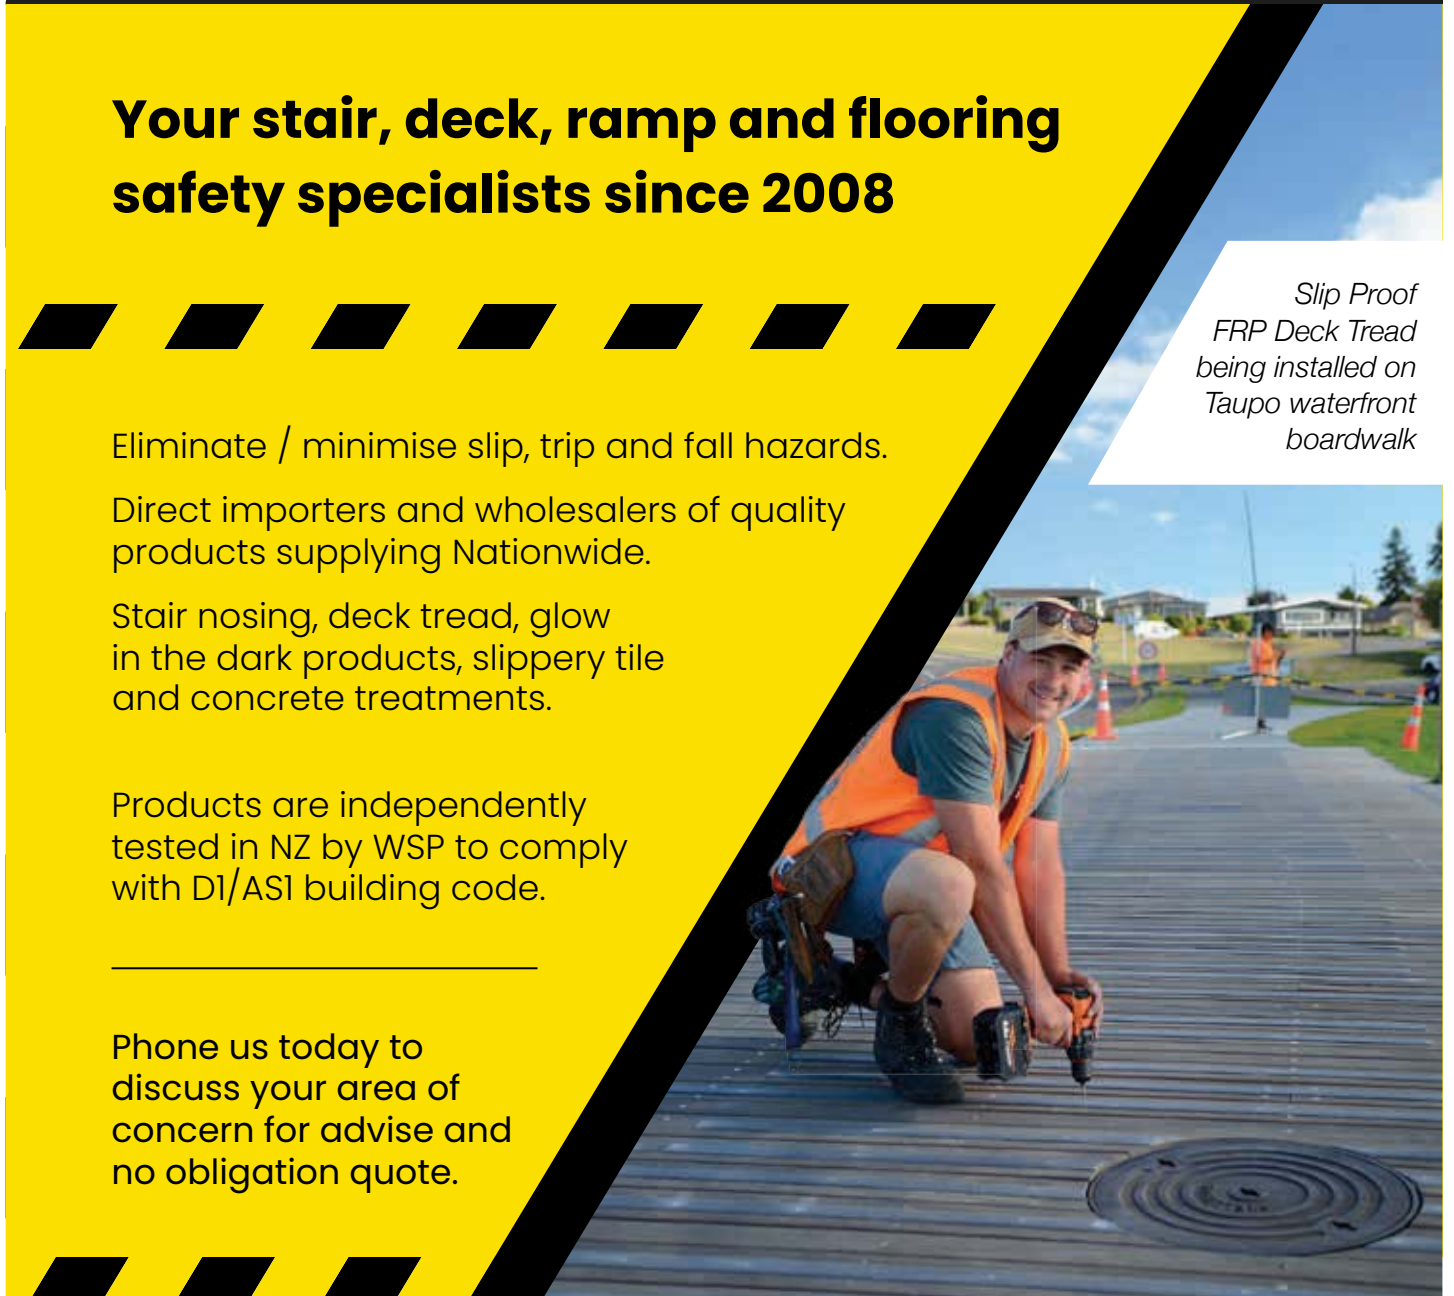

CONTENTS



ALUMINIUM & FRP	4
<u>STAIR NOSINGS</u>	5
<u>DECK TREADS & TILES</u>	11
<u>FIXINGS FOR ALUMINIUM & FRP</u>	12
<u>ANTI SLIP SOLUTIONS</u>	14
<u>TILED, CONCRETE & TERRAZZO SURFACES</u>	15

SLIPPROOFNZ
ANTI-SLIP SAFETY SOLUTIONS

Visit our e-commerce site for full details and pricing.

You can click on the product links above to be taken directly to the site. For further enquiries please phone Slip Proof 0800 55 56 57

ALUMINIUM & FRP STAIR NOSINGS, DECK TREADS & TILES

WHY USE NON SLIP STAIR NOSINGS, DECK TREADS AND FRP TILES?

Most slip and trip accidents on stairs, walkways and ramps happen due to slipping on the leading edge of the step or gradient of a ramp or walkway.

Slippery stairs, ramps and walkways are a major hazard and result in thousands of injuries every year. You must always eliminate the risk where you're reasonably able to.

OUR PRODUCTS SIGNIFICANTLY REDUCE THIS RISK IN THE FOLLOWING WAYS:

Visibility increased due to contrast

Are made from highly slip resistant material
- available in FRP or Aluminium

FEATURES:

- Corrosion resistant
- Guaranteed from delamination for 5 years from purchase date
- Wear and impact resistant
- UV resistant
- Flame retardant



Can be custom cut to your specified length up to 3m.



SLIPPROOFNZ
ANTI-SLIP SAFETY SOLUTIONS

50X30MM MFRP STAIR NOSING

Available in Industrial Grey / Safety Yellow

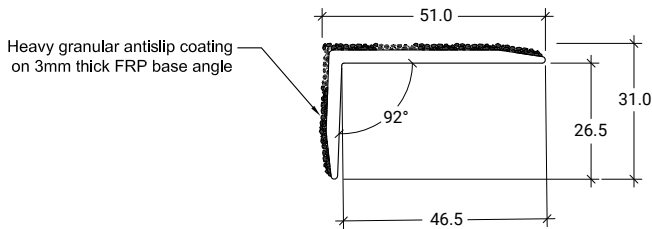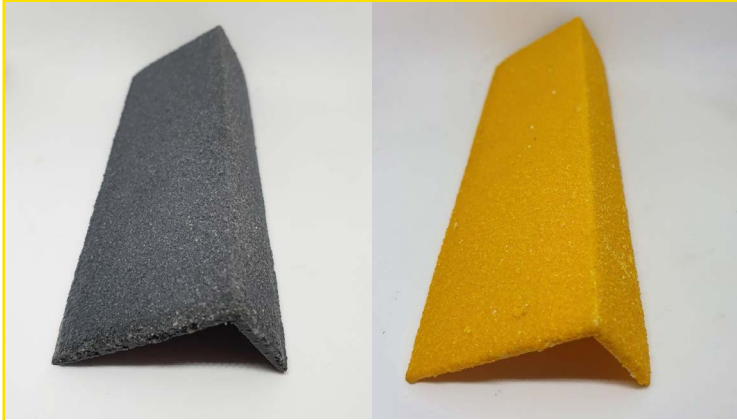

MFRP 50mm
profile cross section

SKU

MFRP50G (Industrial Grey)
MFRP50Y (Safety Yellow)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 88 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant

• Light weight, easy to install and hard wearing



Supplied in 3m length or custom cut to length required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

Available up to 3 Metres

50X30MM MFRP STAIR NOSING

Glow In The Dark

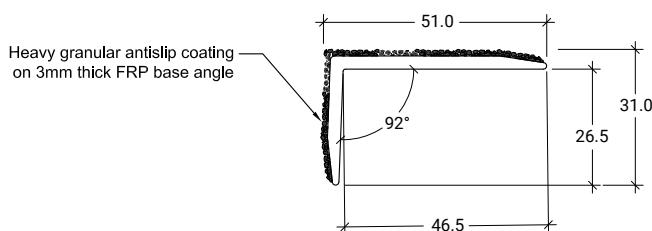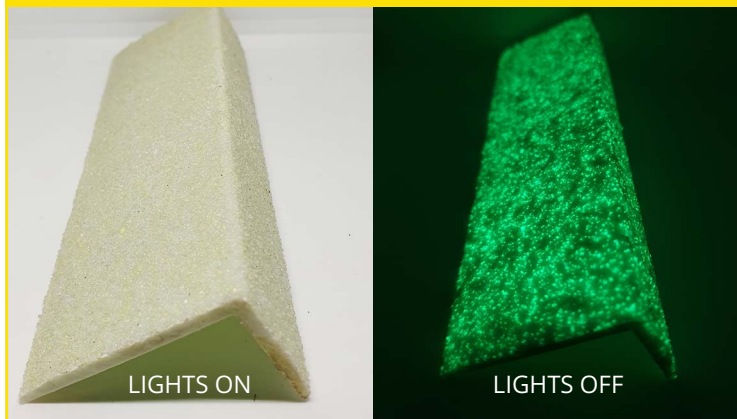

MFRP 50mm
profile cross section

SKU

MFRP50GLO

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 88 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant

• Light weight, easy to install and hard wearing



• Glow in the dark
Supplied in 3m length or custom cut to length required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

Available up to 3 Metres

75X30MM MFRP STAIR NOSING

Available in Safety Yellow

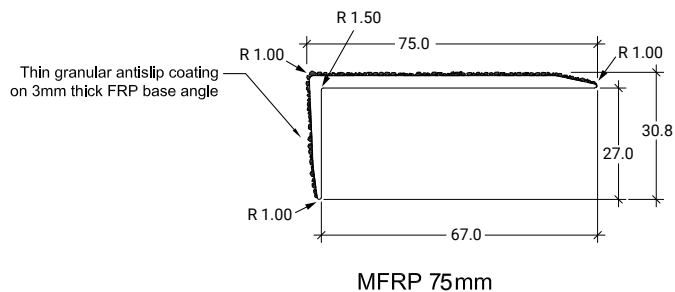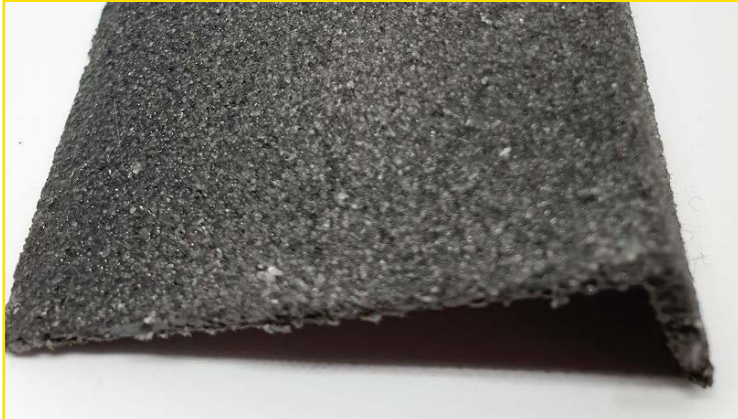

SKU

MFRP75G (Industrial Grey)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 95 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing


Supplied in 3m length or custom cut to length required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

Available up to 3 Metres

75X30MM MFRP STAIR NOSING

Available in Safety Yellow

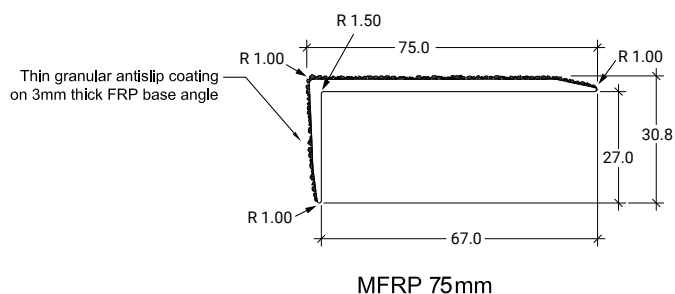

SKU

MFRP75Y (Safety Yellow)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 95 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded FRP impregnated with oxide grit.



- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing

Supplied in 3m length or custom cut to length required.
Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

Available up to 3 Metres



ALUMINIUM STAIR NOSING - Carborundum 4 Strip
Available in Black / Safety Yellow

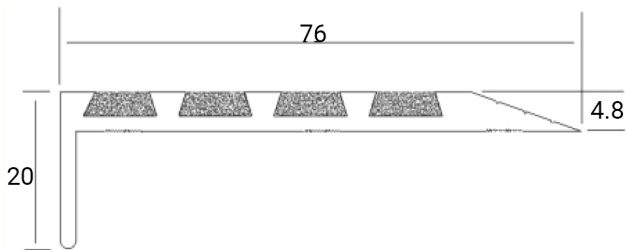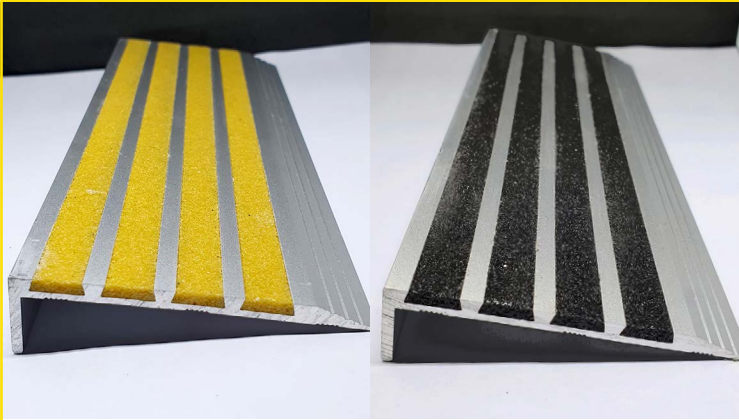

SKU	A4-CAR-76B (Black) A4-CAR-76Y (Safety Yellow)
WSP CO-EFFICIENT OF FRICTION:	CLASS = P5
BRIEF DESCRIPTION	• High quality anodised aluminium stair nosing with 4 Carborundum moulded inserts • Extra heavy duty anodised aluminium frame • Available in Black or Safety Yellow • Guaranteed from delamination for 5 years from purchase date • Supplied in 3m length or custom cut to length required

MAXIMUM LENGTH Available up to 3 Metres

ALUMINIUM STAIR NOSING - Carborundum Solid 59mm
Available in Black / Safety Yellow

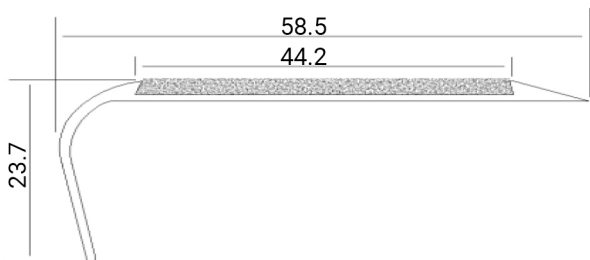
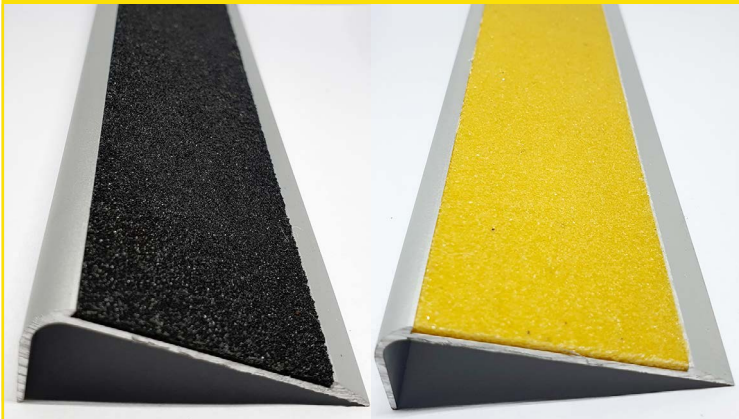


SKU	A1-CAR-59B (Black) A1-CAR-59Y (Safety Yellow)
WSP CO-EFFICIENT OF FRICTION:	CLASS = P5
BRIEF DESCRIPTION	• High quality anodised aluminium Stair nosing with single wide moulded carborundum strip • Heavy duty anodised aluminium frame • Available in Black or Safety Yellow • Guaranteed from delamination for 5 years from purchase date • Supplied in 3m length or custom cut to length required

MAXIMUM LENGTH Available up to 3 Metres

ALUMINIUM STAIR NOSING - Carborundum Solid 65mm




Available in Black / Safety Yellow

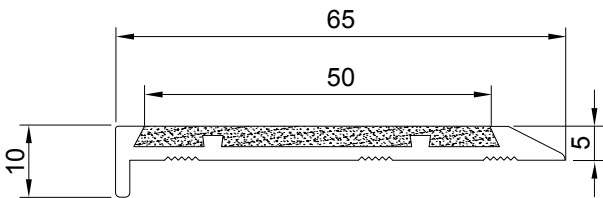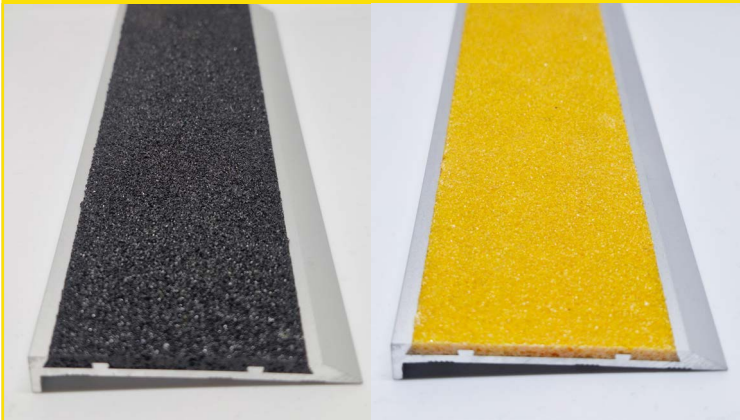

SKU	A1-CAR-65B (Black) A1-CAR-65Y (Safety Yellow)
WSP CO-EFFICIENT OF FRICTION:	CLASS = P5
BRIEF DESCRIPTION	• High quality anodised aluminium Stair nosing with single wide moulded carborundum strip • Heavy duty anodised aluminium frame • Available in Black or Safety Yellow • Guaranteed from delamination for 5 years from purchase date • Supplied in 3m length or custom cut to length required
MAXIMUM LENGTH	Available up to 3 Metres

ALUMINIUM STAIR NOSING - with Rubber Insert

Available with Black / Safety Yellow Insert

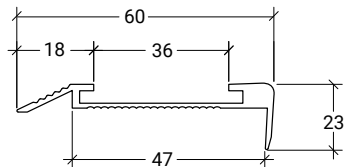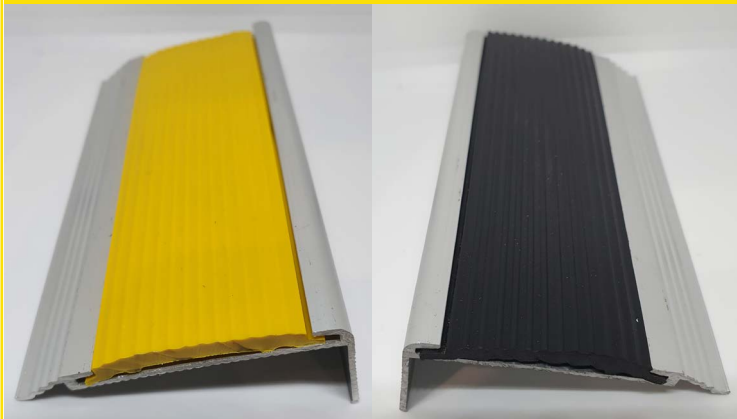

AD 60mm
stair tread nosing cross section

SKU

AD60B (Black)
AD60Y (Safety Yellow)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 48 CLASS = P4

BRIEF DESCRIPTION



- Pre drilled quality anodised aluminium stair nosing complete with PVC rubber insert.
- Protect the stairs from further wear.
- Price includes concrete plugs and stainless steel screws for fitting.
- Supplied in 3m length or custom cut to length required.

MAXIMUM LENGTH

Available up to 3 Metres

ALUMINIUM STAIR NOSING - with Rubber Insert

Glow In The Dark

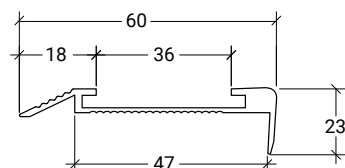

AD GLO 60mm
stair tread nosing cross section

SKU

AD60GLO

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 39 CLASS = P3

BRIEF DESCRIPTION

- Pre drilled quality anodised aluminium stair nosing complete with PVC rubber insert.
- Protect the stairs from further wear.
- Price includes concrete plugs and stainless steel screws for fitting.
- Supplied in 3m length or custom cut to length required.
- Glow in the dark

MAXIMUM LENGTH

Available up to 3 Metres

50MM FRP DECK TREAD



Available in Industrial Grey / Safety Yellow / Black



SKU	DT50G (Industrial Grey) DT50Y (Safety Yellow) DT50B (Black)
WSP CO-EFFICIENT OF FRICTION:	MEAN BP = 77 CLASS = P5
BRIEF DESCRIPTION	Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit. • Guaranteed from delamination for 5 years from purchase date • Corrosion resistant • Wear and impact resistant • UV resistant • Flame retardant • Light weight, easy to install and hard wearing Supplied in 3m length or custom cut to length required. Can be fitted using our Gorilla adhesive and/or screws.
MAXIMUM LENGTH	Available up to 3 Metres

50MM FRP DECK TREAD

Glow In The Dark

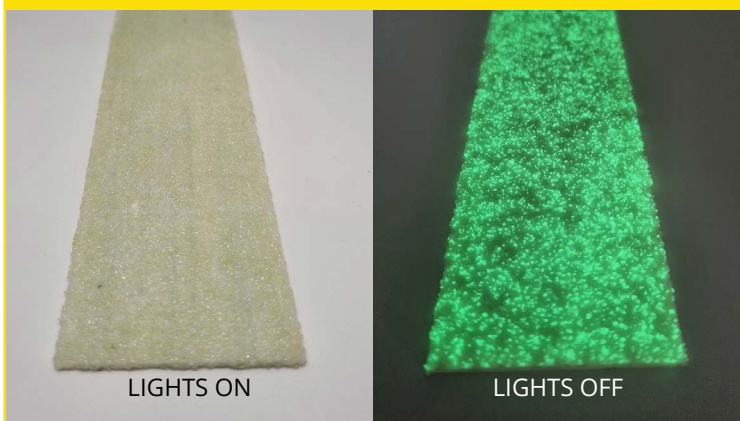


DT 50mm
profile cross section

Note: dimensions include for thin granular
antislip coating on top and edge surfaces

SKU	DT50GLO
WSP CO-EFFICIENT OF FRICTION:	MEAN BP = 77 CLASS = P5
BRIEF DESCRIPTION	Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit. • Guaranteed from delamination for 5 years from purchase date • Corrosion resistant • Wear and impact resistant • UV resistant • Flame retardant • Light weight, easy to install and hard wearing Supplied in 3m length or custom cut to length required. Can be fitted using our Gorilla adhesive and/or screws.
MAXIMUM LENGTH	Available up to 3 Metres

90MM FRP DECK TREAD

Available in Industrial Grey / Safety Yellow / Black

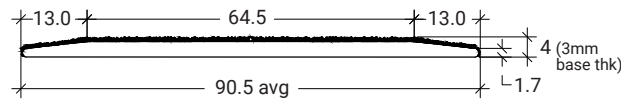

DT 90mm
profile cross section

Note: dimensions include for 1mm thick granular
antislip coating on top and edge surfaces

SKU

DT90G (Industrial Grey)
DT90Y (Safety Yellow)
DT90B (Black)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 69 CLASS = P5

BRIEF DESCRIPTION

Manufactured from pressure moulded
fibreglass strips, with impregnated
oxide grit.

- Guaranteed from delamination for 5 years from purchase date
- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing


Supplied in 3m length or custom cut to length required. Can be fitted using our Gorilla adhesive and/or screws.

MAXIMUM LENGTH

Available up to 3 Metres

FRP FLOOR TILE - 500mm x 500mm

Available in Industrial Grey / Safety Yellow

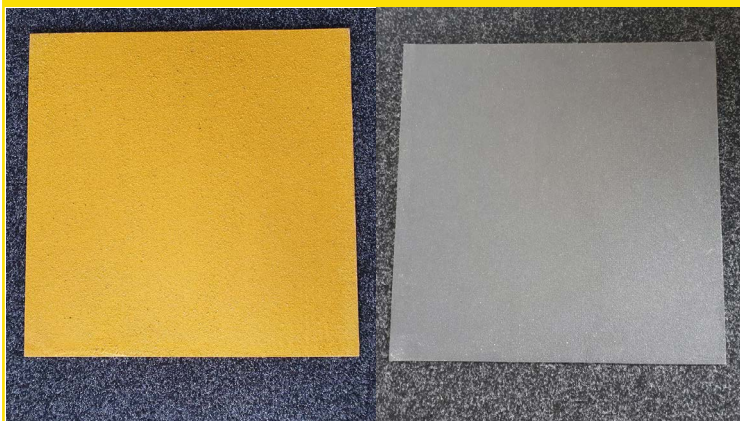

SKU

FRP-TG (Industrial Grey)
FRP-TY (Safety Yellow)

WSP CO-EFFICIENT OF FRICTION:

MEAN BP = 73 CLASS = P5

BRIEF DESCRIPTION

FRP floor tiles are light, easy to
install and hard wearing.

- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing

GORILLA FIX ALL TURBO POLYMER ADHESIVE



SKU

GORILLA

FEATURES AND BENEFITS

- Hand-tight in 20 mins
 - Full strength in 3 hours
 - Offers 20% flexibility
 - 100% solvent free
 - Paintable
 - Delivers great UV and weather resistance
- Allow one 290ml tube for every 10- 30 linear metres of nosing or deck tread (dependant if glueing only or screwing and glueing).
 - The ultimate MS Polymer adhesive when speed matters. Its ultra-fast action, combined with great bonding strength, makes it ideal for all tasks where speed and time are important.

SURFACE ACTIVATOR



SKU

SA500

FEATURES AND BENEFITS

- Liquid, easy to use
- To be used as cleaner and primer on non-porous surfaces
- Suitable for silicone, polyurethane and hybrid sealants

Surface Activator is a cleaner, degreaser and primer. Surface Activator will activate non-porous surfaces such as plastics, coatings and metal for improved adhesion of sealants based on silicone, polyurethane and MS Polymer.

Use to prepare some plastics, powder coatings and other non-porous surfaces before bonding and sealing.

8G X 1-1/4" STAINLESS STEEL COUNTERSUNK SCREW



SKU

SCREW-SS

FEATURES AND BENEFITS

- 8G x 1-1/4" 304 Rib stainless steel countersunk square drive screws.
- For fitting MFRP stair nosings and FRP deck treads to wooden and concrete surfaces (order a concrete plug per screw if fitting to a concrete surface).
- Allow one per 250mm of nosing or deck tread

CONCRETE PLUG



SKU

PLUG

FEATURES AND BENEFITS

- For use with our stainless steel countersunk screws when fitting our MFRP nosing or FRP deck treads to concrete surfaces.
- Allow one screw and concrete plug per 250mm of nosing or deck tread.

ANTI SLIP SOLUTIONS

Do your floors become slippery when they get wet? Do you put out signs to warn of wet floors? Have people previously slipped over on your floors?

"Duty of Care" is a requirement for all employers, managers and landlords to provide a safe working and living environment under the Occupational Health and Safety Act. Failure to do so could leave you responsible should an accident occur, and could lead to a large fine and possible temporary closure of your work place.

Slippery tiles, concrete and walkway surfaces at the work place and home are a major hazard, result in thousands of injuries every year and are one of the most common cause of injuries. You must always eliminate the risk where you're reasonably able to; a non-slip solution is critical to get this problem under control.

Slip Proof NZ's anti-slip solutions is a process that microscopically alters the top surface of your tile or concrete to create a highly effective non-slip texture when wet, without the need to use coatings, tapes or mats. The treatment modifies the surface of the floor, deepens the surface pores, and provides a suction effect when the floor is wet. As you walk on it, instead of aquaplaning across the wet surface, your foot or shoe will grab the floor.

Unlike some other products available, our treatments combine multiple solutions on to the floor surface to give a controlled finish using tri component treatments for tile and quad component treatments for concrete. Slip Proof NZ provide a Commercial Maintenance Cleaner for ongoing maintenance of your non slip treatment. This cleaner contains a portion of the non-slip ingredient to keep your treated floor in premium condition for many years.

Available in easy to apply DIY kits, or phone Slip Proof NZ to discuss your requirements with one of our technicians.



SLIPPROOFNZ
ANTI-SLIP SAFETY SOLUTIONS

DIY KITS FOR TILED SURFACES



Our easy to use, 3 step DIY packs are especially formulated for tiled surfaces.

Comes with full instructions and maintenance cleaner which keeps the anti-slip surface in premium condition, is non-hazardous, pleasantly scented and surface can be walked on immediately after application is completed.

Ideal for indoor and outdoor use.

KITS AVAILABLE IN THE FOLLOWING SIZES:

5 sqm – SKU: RC5M 10 sqm – SKU: RC10M

20 sqm – SKU: RC20M 50 sqm – SKU: RC50M

Areas above 50 sq meters, phone Slip Proof NZ.

DIY KITS FOR CONCRETE & TERRAZZO SURFACES



Our easy to use, 4 step DIY packs are especially formulated for concrete or terrazzo surfaces.

Comes with full instructions and maintenance cleaner which keeps the anti-slip surface in premium condition, is non-hazardous, pleasantly scented and surface can be walked on immediately after application is completed.

Ideal for indoor and outdoor use.

KITS AVAILABLE IN THE FOLLOWING SIZES:

5 sqm – SKU: RT5M 10 sqm – SKU: RT10M

20 sqm – SKU: RT20M 50 sqm – SKU: RT50M

Areas above 50 sq meters, phone Slip Proof NZ.

COMMERCIAL MAINTENANCE CLEANER



Our CMC cleaning product is specially manufactured with a blend of surfactants to remove grease, fats, oils & soaps. It also contains a portion of the active anti-slip ingredient to keep your anti slip treatment in premium condition for many years.

KITS AVAILABLE IN THE FOLLOWING SIZES:

1 Litre – SKU: CMC1L

2 Litres – SKU: CMC2L

5 Litres – SKU: CMC5L

SLIPPROOFNZ

ANTI-SLIP SAFETY SOLUTIONS

SLIP PROOF NZ LTD

Phone: 0800 55 56 57 | Email: info@slipproof.co.nz

WWW.SLIPPROOF.CO.NZ